



RONDCOM 60A

Rotation Accuracy of 0.02 μm ! Alignment Within 60 Seconds!

Industry's First High-Accuracy Air Bearings for Z-axis, R-axis.

This is the CE Marked conformity goods which guarantee environmental resistance and safety with accuracy.



RONDCOM 60A
*CNC detector holder is optional.

Assures Top Class Rotation Accuracy of 0.02 μm

Industry's First High-Accuracy Air Bearings for Z-, R-, and θ -axis.

Gabbro is used in the column, base, and R-axis which guarantees top-class high accuracy over time.

World's Highest Throughput

within 60 seconds for alignment.

Diameter Measuring Function

(*Calibration master for R-axis is required)

Detector with All Orientation Safety Function


If stylus overload is detected, the emergency stop function is automatically activated to prevent damage to stylus and detector.

Teaching Function for Automatic Measurement

Full automatic operation is possible for everything from measuring multiple sections to printing.

Offset Type Detector Holder Available as an Option **patented**

Various workpieces can be measured easily without interference from the R-axis arm.

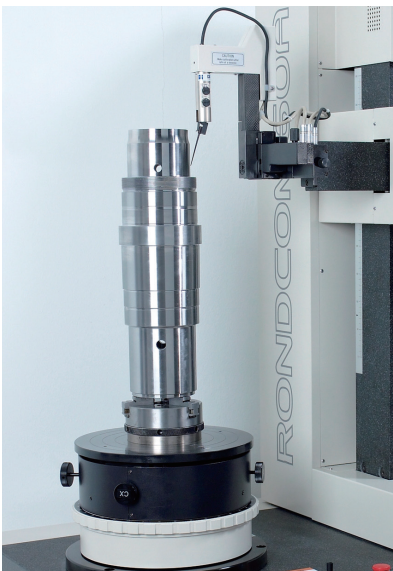


*CNC detector holder is optional.



Example of roundness measurement of uncontinuous inner diameter surface

External view

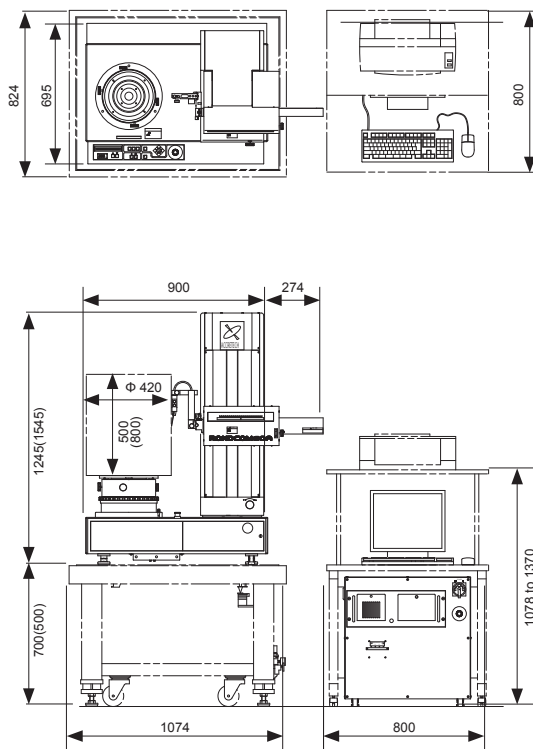

Options

Anti-vibration table: E-VS-S21B (H=700)
 E-VS-R20C (H=500)
 E-VA-R24A (for high column)

System rack: E-DK-S24A

Specifications

Model		RONDCOM 60A		
		High column		
Measuring system		CNC and manual		
Measuring range	Max. measuring diameter	Φ 420 mm		
	Right/left feed range (R-axis)	220 mm		
	Up/down feed range (Z-axis)	500 mm	800 mm	
	Max. loading diameter	Φ 680 mm		
	Max. measuring height	500 mm	800 mm	
Rotation accuracy	Radial direction JIS B 7451-1997	$(0.02 + 6H/10,000) \mu\text{m}$ (H: Height from table top to measuring point mm)		
Straightness accuracy	Up/down direction (Z-axis)	0.1 $\mu\text{m}/100 \text{ mm}$ 0.25 $\mu\text{m}/500 \text{ mm}$	0.2 $\mu\text{m}/100 \text{ mm}$ 0.6 $\mu\text{m}/800 \text{ mm}$	
	Radial direction (R-axis)	0.5 $\mu\text{m}/200 \text{ mm}$		
Parallelism accuracy	Up/down direction (Z-axis)	1.5 $\mu\text{m}/500 \text{ mm}$		
	Radial direction (R-axis)	0.5 $\mu\text{m}/200 \text{ mm}$		
Scale indication accuracy	Radial direction (R-axis)	$(2 + L/200) \mu\text{m}$ L: Moving length mm		
Measurement speed	Rotational speed (θ -axis)	2 to 10/min		
	At auto centering/tilting	6, 10, 20/min		
Up/down speed (Z-axis)		0.6 to 6 mm/s (At moving: Max 30 mm/s)		
Radial direction speed (R-axis)		0.6 to 6 mm/s (At moving: Max 20 mm/s)		
Auto stop accuracy		Z-axis/R-axis	$\pm 5 \mu\text{m}$	
Rotary table	Table outside diameter	Φ 290 mm		
	Adjustment range of centering/tilting	$\pm 5 \text{ mm}/\pm 1^\circ$		
	Load	60 kg		
Detector	Measuring force	30 to 100mN (steplessly variable)		
	Stylus shape	Φ 1.6 mm carbide ball, Length 53 mm		
Type of filter	Digital filter	Gaussian/2RC/Spine/Robust (Spine)		
Cutoff value	Rotational direction (θ -axis)	Low pass	15, 50, 150, 500 peaks/rotation, settable any value in range 15 to 500 peaks/rotation	
		Band pass	1 to 500 peaks/rotation	
	Rectilinear direction (Z-axis)	Low pass	0.025, 0.08, 0.25, 0.8, 2.5, 8 mm (any value in 0.0001 mm units)	
Display magnification		50 to 100 k		
Roundness evaluation of form error		MZC (min. zone circle method), LSC (least square circle method), MIC (max. inscribed circle method), MCC (min. circumscribed circle method), N.C. (no compensation), MULTI (multiple setting)		
Measuring items	Rotational direction	Roundness, flatness, flatness (compound), parallelism, concentricity, coaxiality, cylindricity, diameter deviation, squareness, thickness variation, run-out, radius measurement, partial circle		
	Rectilinear direction	Straightness (Z), straightness (R), taper ratio, cylindricity, squareness, parallelism, diameter deviation, axis straightness		
Analysis processing functions		Notch function (level, angle, cursor), combination of roundness evaluation methods, nominal value collation, cylinder 3D profile display (line drawing, shading, contour line), real-time display, profile characteristic graph display (bearing area curve, amplitude distribution function, power spectrum), CNC automatic measuring function, automatic centering/tilting adjustment function		
Special function		Offset type detector holder (option)		
Display (color monitor)		17" LCD		
Display items		Measuring conditions, measuring parameters, comments, printer output conditions, profile graphics (expansion plan, 3D plan), error messages, etc.		
Recording system		Color or laser printer can be selected		
Other	Power supply (Voltage to be specified), frequency		AC100 to 240 V $\pm 10\%$, 50/60 Hz (grounding required)	
	Power consumption		800 VA (except printer)	
	Air supply	Supply pressure	0.5 to 0.7 MPa	
		Working pressure	0.4 MPa	
		Air consumption volume	49 NL/min	
	Air supply connecting nipple to main unit		One-touch pipe joint for outer diameter Φ 8 mm hose	
	Installation dimensions (W x D x H) mm		2000 x 924 x 1950 mm	2000 x 924 x 2250 mm
Weight (except options)		500 kg	520 kg	
(except anti-vibration table or system rack)				

We have experience in special customization in terms of expanding strokes for each axis, load capacity, etc. Contact the sales personnel for details.